




Installation and Hardware Details for Double Doors

Test Pressure +28.8 PSF -33.0 PSF

(GNDC002WL)

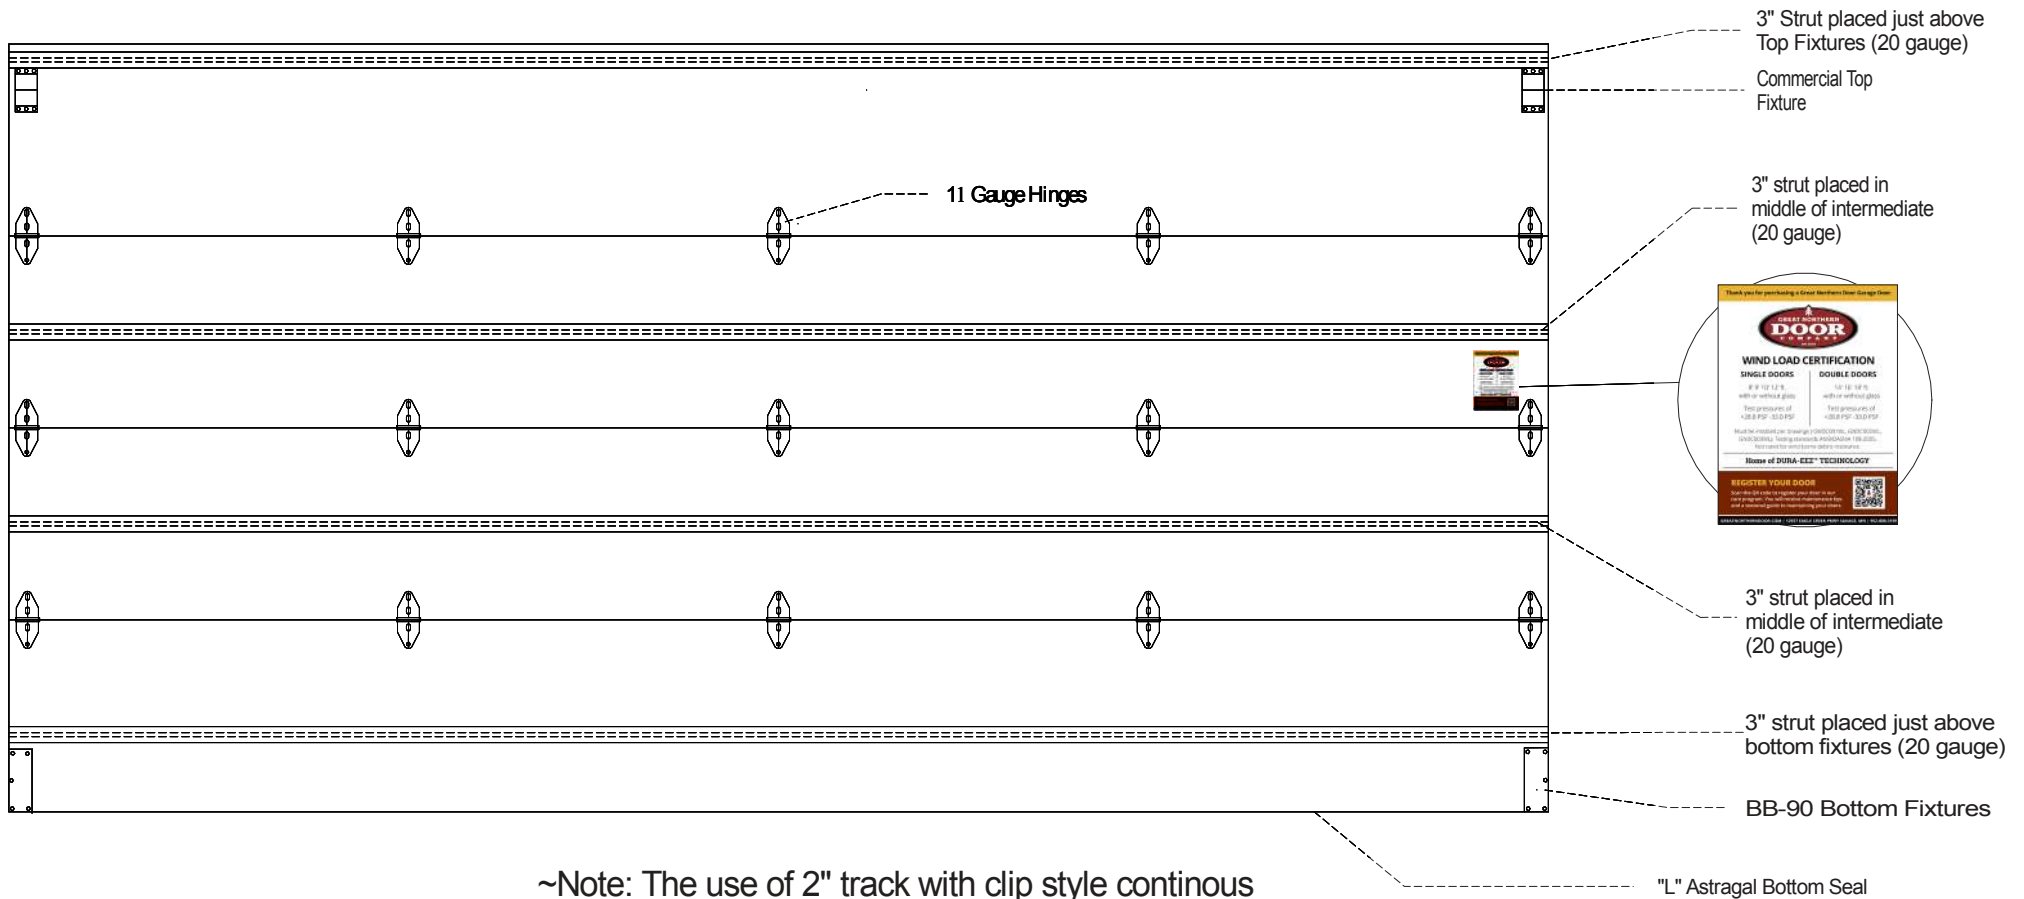

~Note: The use of 2" track with clip style continuous jamb brackets are required and fastened to jamb with 3/8" x 3" lag screws.

~Placement of hinges is predetermined by thru-bolts

~Wind load certification placard placed by installer after install is complete